Customer Name: Year/Model: Date:

License Plate: VIN: RO/Tag:

Mileage: Service Advisor: Technician:

CHECKED and OKAY | **MAY REQUIRE FUTURE ATTENTION** | **REQUIRES IMMEDIATE ATTENTION**

Check Every 5,000 (or 3,000) Miles

OK		ADD	
☐	CHECK & FILL	☐	Window washer fluid level
☐		☐	Transmission fluid level
☐		☐	Brake fluid level
☐		☐	Power steering fluid level
☐		☐	Coolant recovery reservoir fluid level
☐		☐	4 x 4 transfer case, front drive axle, clutch reservoir (truck only)

☐		☐	Operation of horn, interior lights, exterior lamps, turn signals, hazard and brake lamps
☐		☐	Windshield washer spray, wiper operation and wiper blades
☐		☐	Windshield for cracks, chips and pitting
☐		☐	Radiator, heater, and air conditioning hoses for leaks and damage
☐	☐	☐	Oil and/or fluid leaks
☐	☐	☐	Constant velocity (CV) drive axle boots (if equipped)
☐	☐	☐	Exhaust system (leaks, damage, loose parts)
☐	☐	☐	Drive shaft, transmission, u-joint and shift linkage (if equipped) and lubricate (as needed)
☐	☐	☐	Steering and steering linkages and lubricate
☐	☐	☐	Suspension (shocks/struts for bounce/leaks/ damage) and lubricate

Check Every 15,000 Miles (Plus Above)

☐	☐	☐	Brake system (including lines, hoses, and parking brake) and wheel end for end-play and bearing noise
☐	☐	☐	Suspension (shocks/struts for bounce/leaks/damage) and lubricate

Check Every 30,000 Miles (Plus Above)

☐	☐	Accessory drive belts(s)
☐	☐	Battery terminals (clean if necessary)
☐	☐	Clutch operation
☐	☐	Evaporative fuel system hoses and tubes (only at 60,000 mile intervals pre-1999 vehicles)

Comments:

Next Appointment Date: Time:

This Courtesy Inspection Completed by Your Service Team!

Check Battery Performance

☐ Good

☐ Recharge

☐ Bad

Factory Spec Cold Cranking Amps ☐

Actual Cold Cranking Amps ☐

Measure Front / Rear Brake Linings

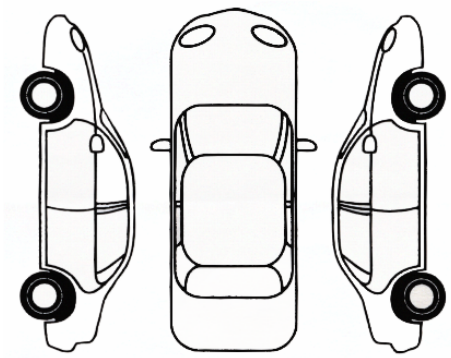

Over 5mm (Disc) or Over 2mm (Drum)

3 to 5mm (Disc) or 1.01 to 2mm (Drum)

Less than 3mm (Disc) or 1mm or less (Drum)

Brake Measurements Not Taken This Service Visit ☐

Check Tires

LF	TREAD DEPTH	RF
☐ 7/32 or Greater		☐ 7/32 or Greater
☐ 4/32 to 6/32		☐ 4/32 to 6/32
☐ 3/32 or less		☐ 3/32 or less
☐ 7/32 or Greater		☐ 7/32 or Greater
☐ 4/32 to 6/32		☐ 4/32 to 6/32
☐ 3/32 or less		☐ 3/32 or less
LR		RR

☐☐☐ LF ☐☐☐ RF

WEAR PATTERN / DAMAGE

☐☐☐ LR ☐☐☐ RR

Tire Pressure Set to Factory Recommended Front ☐ Rear ☐ PSI

Tonda Enterprises, Inc.